



NTX and NVX

Stainless Steel Cameras for Preventative Video Surveillance System in Critical Environments




The NVX and NTX are IP68 stainless steel cameras, developed to provide an efficient and preventative surveillance system in the most critical environmental conditions.

These cameras are made entirely from electropolished AISI316L stainless steel and have a compact and lightweight design that, along with the rapid connectors, helps installation and maintenance.

The modular support for wall, ceiling or parapet is supplied as standard.

NVX and NTX cameras are ideal for the most demanding applications in the marine and industrial sectors, food industry, critical infrastructures, power plants, fire prevention and transport sector, including railways and motorway tunnels.

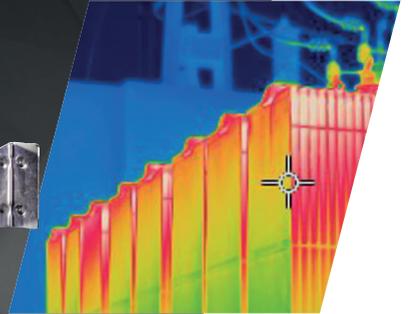

NVX

FULL HD CAMERA WITH DELUX TECHNOLOGY



The NVX is an IP FULL HD super low-light camera with high corrosion resistance. This camera incorporates the DELUX imaging and encoding technology for recording incredibly clear colour video day or night.

Its extremely sensitive light sensor provides high colour rendering and maximum noise reduction in very low light conditions of 0.006 lux.

Version with integrated wiper.

Ideal for the sea and rail sectors, motorway tunnels and industrial applications - such as the food industry.

NTX

THERMAL CAMERA WITH RADIOMETRIC FUNCTIONS



The NTX is an IP68 thermal camera that offers temperature detection based on the 4 central pixels of the image. With the advanced version, the temperature of a specific object can be measured at any point in the image by means of defining a specific area.

As well as this, the radiometric functions offer the option to set a temperature limit, beyond which an alarm will be raised.

Ideal for the marine and industrial sectors, critical infrastructures, power plants and transport sector, including railways and motorway tunnels.

MAIN FEATURES

- Camera Full HD 1080p, 30x, 60fps
- Minimum Illumination: Colour: 0.006lx - B/W: 0.0006lx
- Video compression H.264/AVC, MJPEG, JPEG and MPEG4
- Complies with ONVIF, Profile S and Profile Q
- Day/Night (Auto ICR: automatic removal of IR filter)
- De-fog function
- Up to 3 simultaneous video streams in FULL HD
- Power supply: 24Vdc/24Vac, PoE+
- Tested and certified: from -40°C (-40°F) to +65°C (149°F)
- Video analytics

MAIN FEATURES

- Thermal camera:
- Image Device: Uncooled VOx microbolometer
- Lenses: 35mm, 25mm, 19mm, 13mm, 9mm
- Resolution: 336x256 or 640x512
- Image update frequency: 7.5Hz or 30Hz
- Power supply: 24Vdc/24Vac, PoE+
- Operating temperature: from -40°C (-40°F) to +65°C (149°F)
- Complies with ONVIF, Profile S and Profile Q
- Radiometric analysis



VIDEO SECURITY
PRODUCTS

www.videotec.com

info@videotec.com

 Made in Italy since 1986