

DTRX3

TELEMETRY DATA RECEIVER, WITH 17 FUNCTIONS



DTRX3

DESCRIPTION

The DTRX3 is a digital receiver, controlled by a microprocessor, for remote control of a Pan & Tilt motor, motor-driven zoom lens, wiper, washer and 4 auxiliary contacts.

Connection to the control unit can be RS232 or RS485. This digital receiver can be controlled by DCJ and DCTEL keyboards or by PC via RS232 serial connection.

6 PG11 cable glands make connections easier. By means of a switch, it is possible to select the Pan & Tilt voltage (230Vac or 24Vac) for the model DTRX3.

MAIN FEATURES

11 standard functions for the control of P & T motors and zoom lenses, 6 functions for auxiliary services (2 x dry contacts, 1 x 12Vdc, 1x 24Vac, wiper and washer)

Maintenance of configuration even in case of power loss

Selectable communication: RS-232 and RS-485

Selection of the P&T motor power supply (24Vac or 230Vac) and camera (12Vdc or 24Vac)

Up to 40 presets

4 alarm inputs, (preset in case of alarm)

Compatible with protocol PELCO D

Also available in 24Vac (DTRX324)

Operating temperature: from -20°C (-4°F) up to +50°C (122°F)

TECHNICAL DATA

GENERAL

17 Functions: UP, DOWN, LEFT, RIGHT, AUTO, WASHER, WIPER, ZOOM TELE, ZOOM WIDE, FOCUS NEAR, FOCUS FAR, IRIS OPEN, IRIS CLOSE, AUX1, AUX2, AUX3, AUX4

999 selectable addresses through Dip Switches

Serial communication selectable: RS232 / RS485

Repeater RS232 or RS485 for daisy chain configuration

Ability of using both polarity inversion lenses and common wire lenses

LED indicating power supplied to the unit

LED indicating active function

EEPROM for the storage of active options

16 bit microcontroller with re-programmable Flash memory

PRESET / SCAN / PATROL functions with an automatic recognition of the existing functions

Self-test installation procedure

Ability to memorize up to 40 PRESET functions (P&T motor and lens)

4 alarm contacts set as N.O. or N.C.

Supplied with 2 PG11 blanking caps, 4 wall mounts with relevant fastening screws

MECHANICAL

Plastic material enclosure

6 PG11 cable glands

External dimensions: 337x237x128mm (15x9x5in)

Unit weight: 2.5kg (5.5lb)

ELECTRICAL

DTRX3

Supply voltage: 230Vac, 50/60Hz

Consumption: 60W

Switching power: 100W max

Power supplied to the positioning device: 24Vac/230Vac, 50/60Hz

Power supplied to the wiper: 24Vac/230Vac, 50/60Hz

Power supplied to the washer: 230Vac, 50/60Hz

Camera power supply: 12Vdc, max 350mA (AUX1) and 24Vac, max 180mA (AUX2)

Power supplied to the lens: from 3Vdc to 12Vdc (max 100mA)

2 dry contacts: 1A 230Vac, 1A 24Vac (AUX3, AUX4)

Fuses: 1 A F 250V, 2.5 A F 250V

DTRX324

Supply voltage: 24vac, 50/60Hz

Consumption: 40W

Switching power: 100W max

Power supplied to the positioning device: 24Vac, 50/60Hz

Power supplied to the wiper: 24Vac, 50/60Hz

Power supplied to the washer: 24Vac, 50/60Hz

Camera power supply: 12Vdc, max 350mA (AUX1) and 24Vac, max 180mA (AUX2)

Power supplied to the lens: from 3Vdc to 12Vdc (max 100mA)

2 dry contacts: 1A 230Vac, 1A 24Vac (AUX3, AUX4)

Fuses: F5: 6.3 A F 250V

SERIAL COMMUNICATIONS

Selectable communication speed

Repeater RS232 or RS485 for daisy chain configuration

Telemetry data input on coax cable RG59 or equivalent with DTCOAX optional board for a max distance 350m (1148ft) from Matrix Series SM

Telemetry data input RS485 on Matrix Series SM serial output for a max distance of 1200m (3937ft)

Telemetry data input RS485 on keyboards serial output for a max distance of 1200m (3937ft)

Telemetry data input RS232 for PC or keyboard control for a max distance of 15m (49ft)

Protocols:

- VIDEOTECH (300, 1200, 9600, 19200 baud)
- PELCO D (2400, 4800, 9600, 19200 baud)
- VIDEOTECH MACRO (1200, 9600, 19200, 38400 baud)

PELCO is registered trademark.

The product may be interfaced with devices not manufactured by VIDEOTECH. It is possible that the interface protocols have changed or are in a different configuration from earlier tested units by VIDEOTECH. VIDEOTECH recommends a test prior to installation. VIDEOTECH will not be liable for any installation costs or lost revenues in the event a compatibility problem will occur.

ENVIRONMENT

For indoors and outdoors installation

Operating temperature: from -20°C (-4°F) up to +50°C (122°F)

Relative humidity: from 5% up to 95%

CERTIFICATIONS

Electrical safety (CE): EN60065, EN62368-1

Electromagnetic compatibility (CE): EN50130-4, EN55022 (Class B), EN61000-6-3

IP protection degree: EN60529 (IP56)

EAC certification

RELATED PRODUCTS

DCJ Keyboard for video and telemetry control

NXP210 Stainless steel Pan&Tilt, 230Vac


Retrofit on discontinued products: contact VIDEOTECH for further specifications.

PACKAGE

Model Number	Weight	Dimensions (WxHxL)	Master carton
DTRX3	2.5kg (5.5lb)	34.5x24x15.5cm (13.6x9.4x6.1in)	5

TECHNICAL DRAWINGS

The indicated measurements are expressed in millimetres.

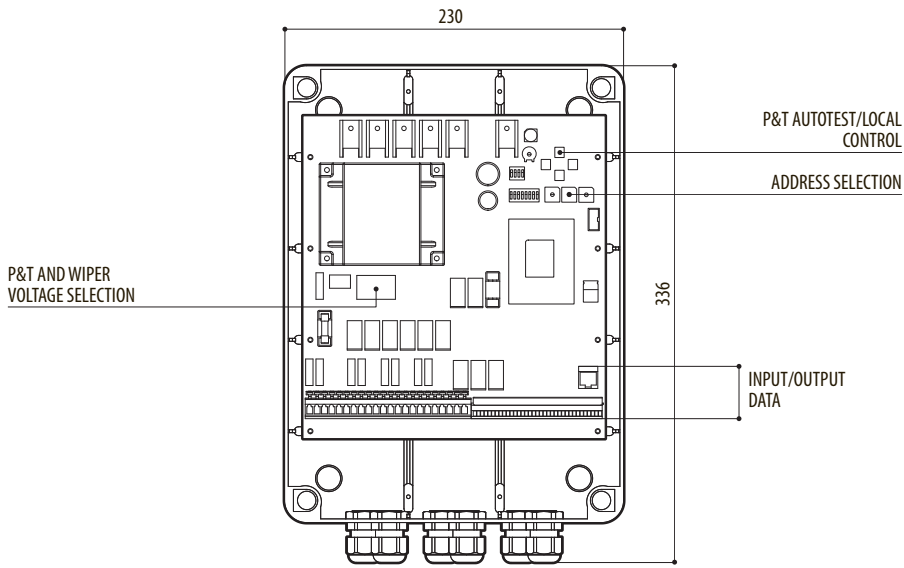

DTRX3