

WASNX

WASHER PUMP WITH SOLENOID VALVE FOR STAINLESS STEEL PRODUCTS



IP65



WASNX

WASNX

DESCRIPTION

The WASNX washer pump is an important element for effective video surveillance because it guarantees sharp images in all environmental conditions and reduces the need for maintenance.

The WASNX system is designed for operate in special environments such as marine, industrial, chemical and where the external conditions are highly corrosive.

The wash system is also compatible with third-party products.

The kit includes a stainless steel 10-litre tank with solenoid valve.

MAIN FEATURES

Enclosure made of stainless steel AISI 316L

Delivery head: up to 20m (66ft)

Water tank capacity: 10l (2.6gal)

Suitable for Videotec products or with third-party products

Operating temperature: from -20°C (-4°F) up to +60°C (140°F)

Available voltages: 230Vac, 120Vac, 24Vac

TECHNICAL DATA

MECHANICAL

Enclosure made of stainless steel AISI 316L

Delivery pipe supplied

- Length: 20m (66ft)

Pressure: 4bar max

Delivery head: 20m (66ft)

Material (delivery pipe): Antistatic plastic

Dimensions (WxHxL): 429x697x255mm (16.9x27.4x10in)

Unit weight: 18kg (40lb)

Water tank capacity: 10l (2.6gal)

ELECTRICAL

Supply voltage/Current consumption

- 230Vac, 0.07A, 50/60Hz
- 120Vac, 0.13A, 50/60Hz
- 24Vac, 0.7A, 50/60Hz

ENVIRONMENT

For installation indoors and outdoors

Operating temperature of solenoid valve: from -20°C (-4°F) up to +60°C (140°F)

Operating temperature of device: depending on the solidification temperature of the liquid

CERTIFICATIONS

Electrical safety (CE): EN60950-1

Electromagnetic compatibility (CE): EN61000-6-2, EN61000-6-3

Outdoor installation (CE): EN60950-22

IP protection degree (EN60529):

- IP65 (solenoid valve only, enclosure not rated)

EAC certification

PART NUMBER

WASNX1V10L20M00 Tank 10l with integrated manual pump controlled by solenoid valve, delivery head up to 20m (66ft) max, IN 230Vac

WASNX2V10L20M00 Tank 10l with integrated manual pump controlled by solenoid valve, delivery head up to 20m (66ft) max, IN 24Vac

WASNX3V10L20M00 Tank 10l with integrated manual pump controlled by solenoid valve, delivery head up to 20m (66ft) max, IN 120Vac

SPARE PARTS

OWEXTANK Pump in stainless steel, 10l (2.6gal)

OWEXTUB Water pipe, 20m (66ft)

BRACKETS AND ADAPTORS

NXCOL AISI 316L stainless steel pole adapter module

NXCW AISI 316L stainless steel corner adapter module

PACKAGE


| Model Number | Weight | Dimensions (WxHxL) | Master carton |
|-----------------|-----------------|-------------------------------|---------------|
| WASNX1V10L20M00 | 20.3kg (44,7lb) | 30x74x46cm (11.8x29.1x18.1in) | - |
| WASNX2V10L20M00 | 20.3kg (44,7lb) | 30x74x46cm (11.8x29.1x18.1in) | - |
| WASNX3V10L20M00 | 20.3kg (44,7lb) | 30x74x46cm (11.8x29.1x18.1in) | - |

WASNX - CONFIGURATION OPTIONS

| | Voltage | Water tank capacity | Delivery head | |
|--------------|------------------|-------------------------|-----------------------|-----------|
| WASNX | 1V 230Vac | 10L 10l (2.6gal) | 20M 20m (66ft) | 00 |
| | 2V 24Vac | | | |
| | 3V 120Vac | | | |

TECHNICAL DRAWINGS

The dimensions of the drawings are in millimetres.

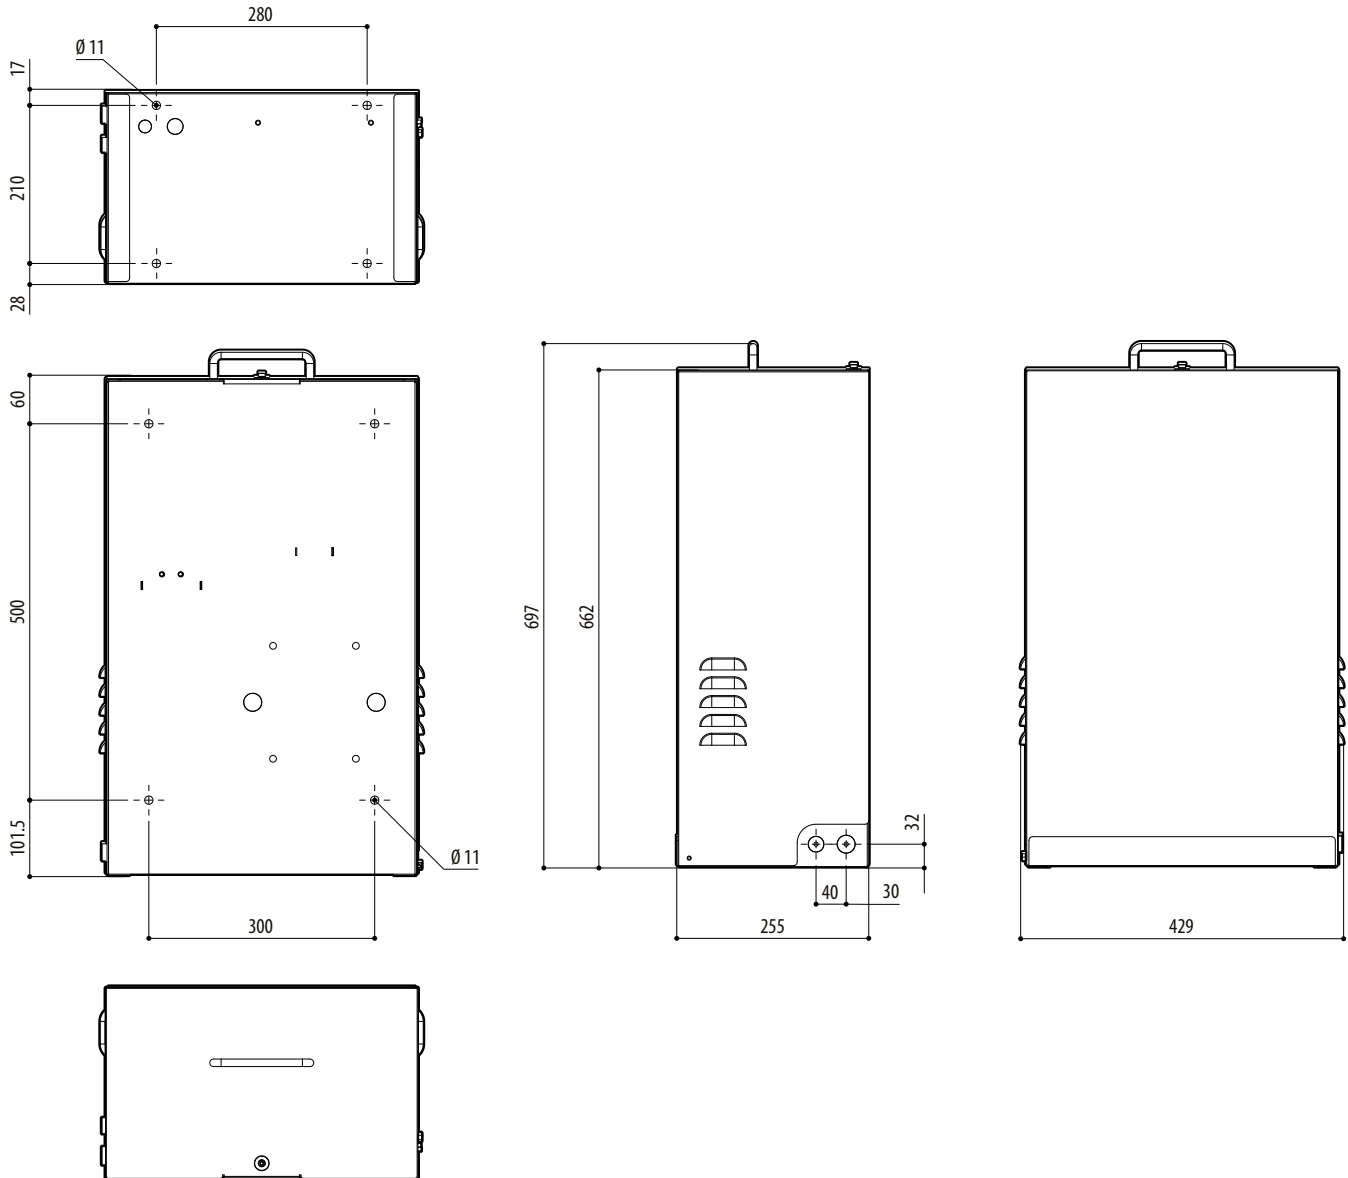

WASNX